

# LED Wraparound

3-Wattages + 3-CCT (35/40/40K), Damp Rated, 130 lm/W, Dimmable

## FEATURES

<b>Lumen Output</b>	3900 to 5200 lumens
<b>Wattage</b>	3-WATT (40W Max)
<b>Efficacy</b>	130 lm/W
<b>Input Voltage</b>	120-277V
<b>Dimmable</b>	0-10V Continuous
<b>CCT</b>	3-CCT (35K/40K/50K)
<b>Size</b>	4-FT
<b>Color</b>	White
<b>Rating</b>	Damp Location
<b>Warranty</b>	5 Years

## APPLICATIONS

Premium indoor luminaire suitable for general indoors, lobbies, offices, meeting rooms, restrooms, hallways, stairwells, storage-closets, kitchens, and workstations.

## CONSTRUCTION

Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. Damp Location rated.

## ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -4°F to 113°F (-20°C to 45°C).

## MOUNTING

Surface Mounting on ceilings or beams.

## OPTICS

Anti-UV Frosted Prismatic Polycarbonate Lens standard.

## LISTINGS

DLC Premium listed. ETL certified to meet US and Canadian standards. FCC and RoHS compliant.

## WARRANTY


5 year exclusive limited warranty.

Project:
Date:
Catalog No:
Prepared By:

Tunable 4-FT Models




Tuning Switches Inside Housing



## TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3500K                      4000K                      5000K

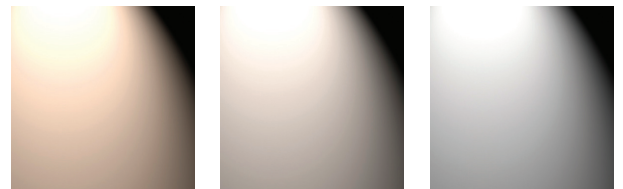

## SPECIFICATIONS

### ENERGY DATA

**Input Voltage:** 120-277V  
**Input Frequency:** 50/60 Hz  
**Wattage:** 3-WATT (40W Max)  
**Power Factor:** >0.9  
**Total Harmonic Distortion (THD):** <15%  
**Operating Temperature:** -4°F to 113°F (-20°C to 45°C)

### LIGHTING DATA

**Lumens:** 3900 to 5200  
**Lumens Per Watt:** 130 lm/W  
**Correlated Color Temperature (CCT):** 3-CCT (35K/40K/50K)  
**Dimmable:** 0-10V  
**Color Rendering Index (CRI):** >80  
**L70:** 50000 hours

## ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
WR4FT303540W-3545K	4-FT	(30W, 35W, 40W)	120-277V	0.28A@120V, 0.12A@277V 0.32A@120V, 0.14A@277V 0.44A@120V, 0.16A@277V	3900 4550 5200	130 lm/W	(3500K, 4000K, 5000K)	0-10V	White	47.60"L x 7.08"W x 2.90"H

## PHYSICAL DIMENSIONS

### 4-FT Model

47.60"L x 7.08"W x 2.90"H

